


Johnson BMX Race Plate Mounting Instructions


Step 1: Sticky Base Mounting System

This step is used to make up all of the Sticky Base Mounting systems. Set out the material below for each mounting base to make up. You will also need a pair of scissors or diagonal wire cutters (To cut the tie-wrap). Separate the Velcro provided and arrange it so that only a 3/4 inch of the Velcro overlaps each other and re-stick it together as depicted below

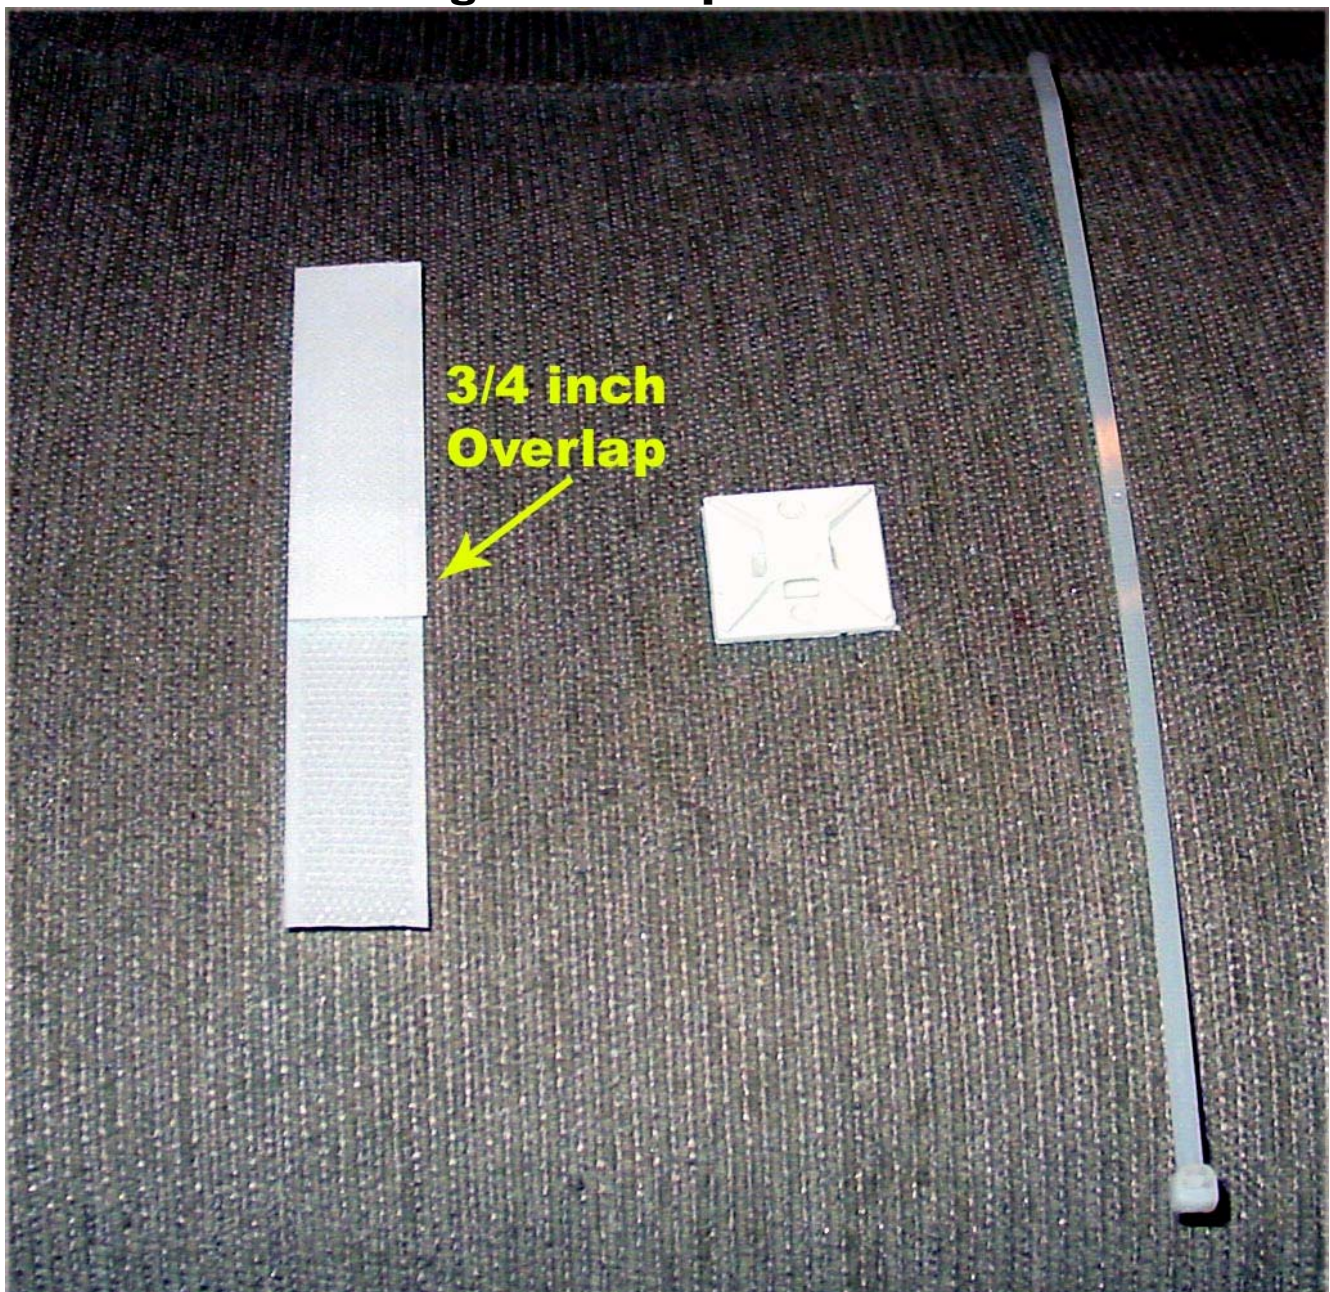


Step 2: Sticky Base Mounting System

Place the Velcro on top of the sticky base so that the overlap area is centered on the base (Adhesive side down).

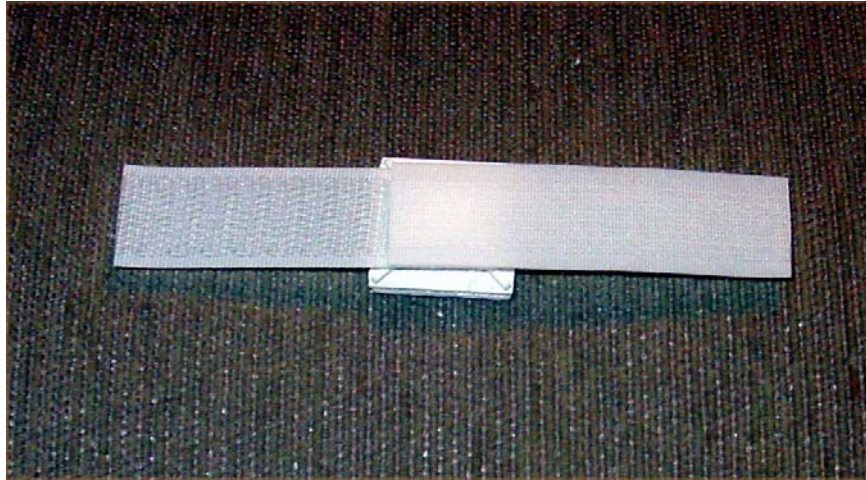


Then run the tie-wrap through the two holes in the base that run perpendicular to the Velcro, as depicted below.

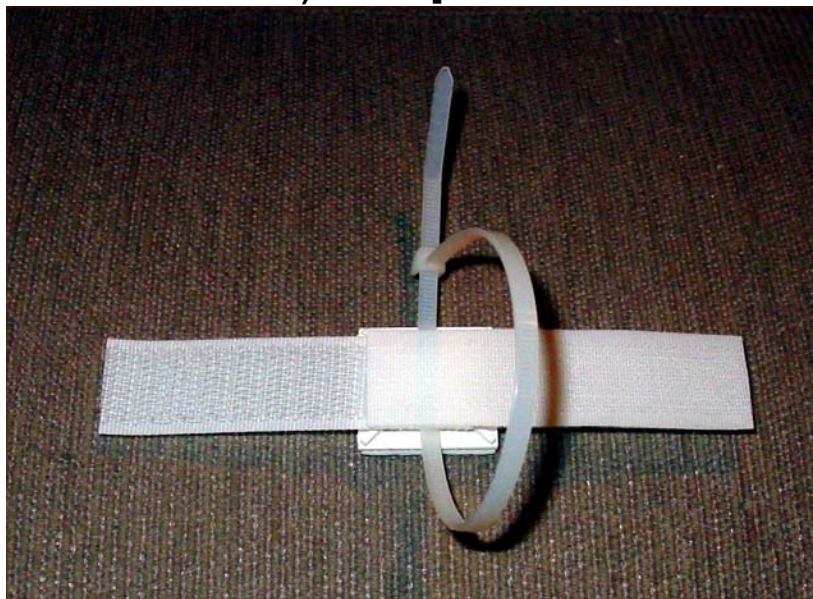

Step 3: Sticky Base Mounting System


Finish cinching up the tie wrap so that the Velcro is securely fastened to the base. The finished product should look like this.

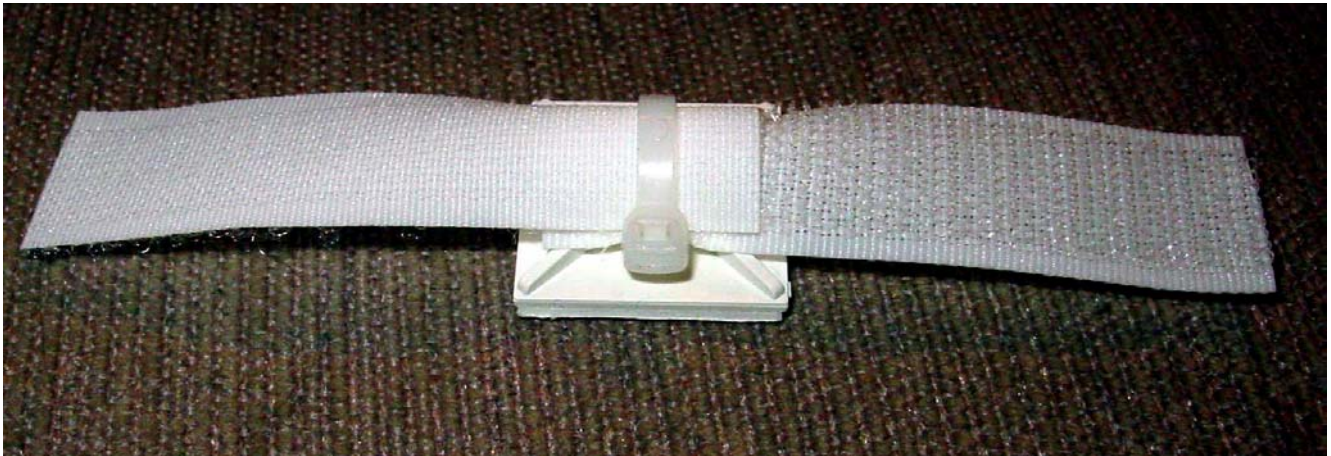

Repeat for all other Sticky Base Mounting fixtures. Once all the Sticky Base Mounting fixtures are completed you are ready to move on and mount your race plate.

Step 2: Mounting Your Plate

Affix the Velcro/Adhesive Mounts where you had marked to install them. DO NOT REMOVE the protective film on the adhesive. Verify that you plate will properly fit in this location by doing a test fit. Verify that the Adhesive base will not overhang the plate edges. Adjust the Velcro/Adhesive Mounts as necessary.

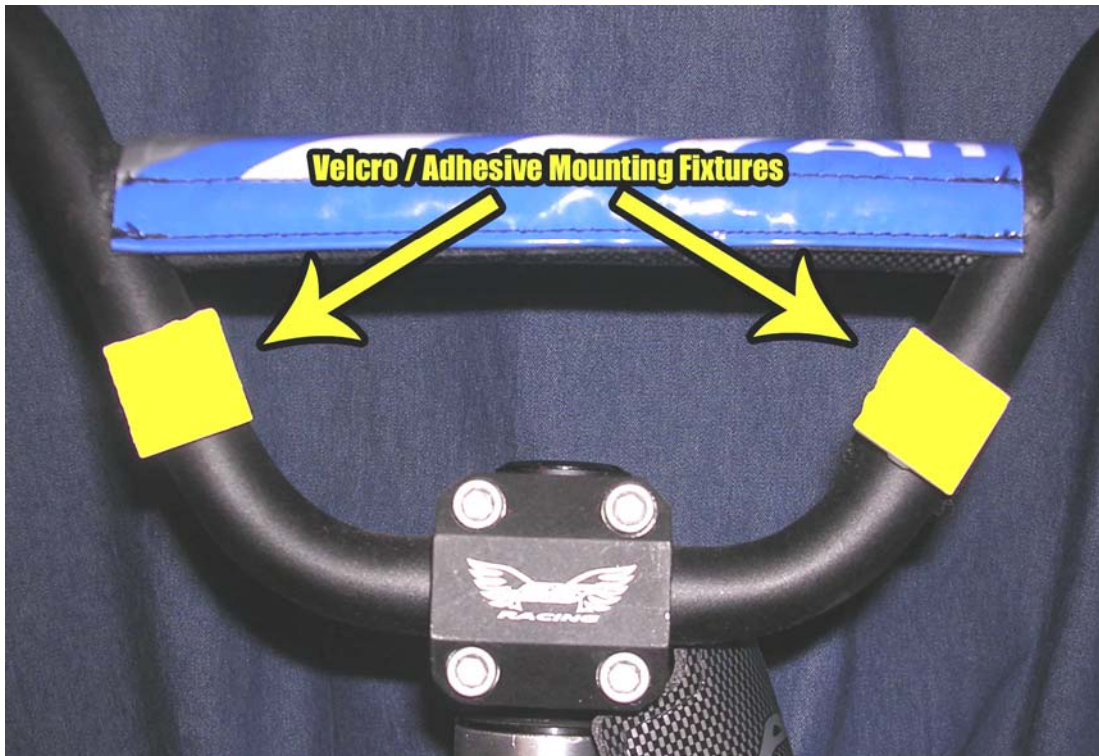

Step 3: Mounting Your Plate

If everything is set and you are ready to install your plate, remove the protective film from the Velcro/Adhesive Mounts.



Align your plate to the Velcro/Adhesive Mounts and firmly press the race plate onto the adhesive. Make sure to apply a firm amount of pressure to the adhesive area, otherwise dirt or moisture may lead to failure of the mounting system. If your mounting system fails....more sticky bases may be picked up in the electrical section at a Home Depot or other hardware store.

